



TOP VIEW

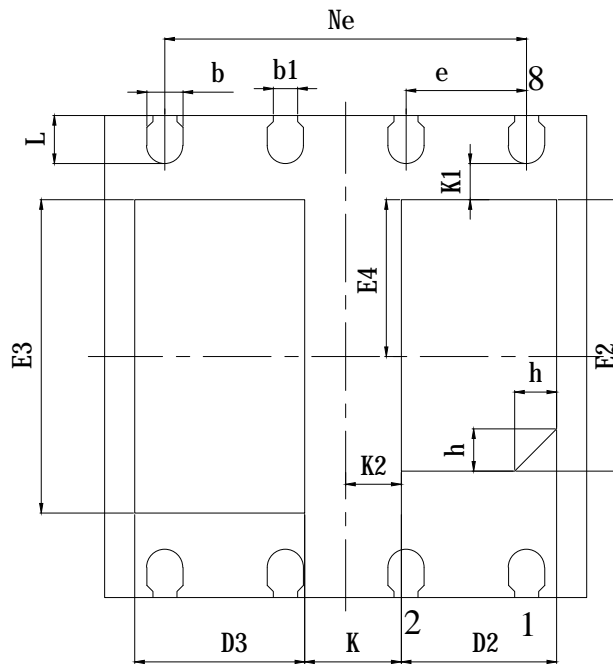


BOTTOM VIEW

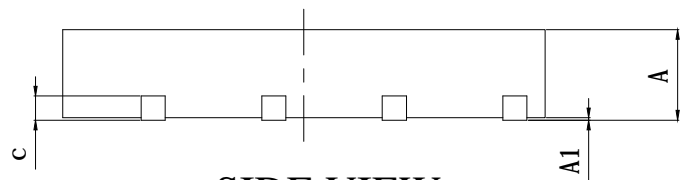

SIDE VIEW

| SYMBOL | MILLIMETER |      |      |
|--------|------------|------|------|
|        | MIN        | NOM  | MAX  |
| A      | 0.70       | 0.75 | 0.80 |
| A1     | 0          | 0.02 | 0.05 |
| b      | 0.25       | 0.30 | 0.35 |
| b1     | 0.20REF    |      |      |
| c      | 0.18       | 0.20 | 0.25 |
| D      | 3.90       | 4.00 | 4.10 |
| D2     | 1.19       | 1.29 | 1.39 |
| D3     | 1.31       | 1.41 | 1.51 |
| e      | 1.00BSC    |      |      |
| Ne     | 3.00BSC    |      |      |
| E      | 3.90       | 4.00 | 4.10 |
| E2     | 2.15       | 2.25 | 2.35 |
| E3     | 2.50       | 2.60 | 2.70 |
| E4     | 1.25       | 1.30 | 1.35 |
| L      | 0.35       | 0.40 | 0.45 |
| h      | 0.30       | 0.35 | 0.40 |
| K      | 0.75       | 0.80 | 0.85 |
| K1     | 0.25       | 0.30 | 0.35 |
| K2     | 0.41       | 0.46 | 0.51 |

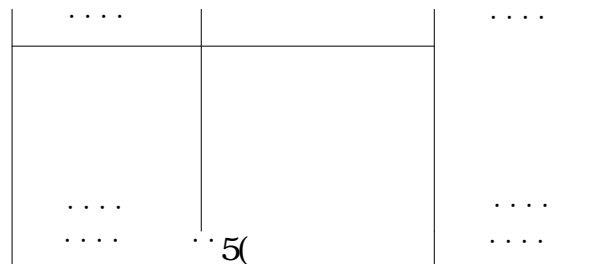

HuaTi an Technology(Xi ' an) CO. , LTD

. <HBUSS, S( S( SSS&

DFN8L(0404X0. 75-1. 00) (A)

