


| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | 0.28 | 0.30 | 0.32 |
| A1 | 0 | 0.02 | 0.05 |
| b | 0.15 | 0.20 | 0.25 |
| c | 0.102REF | | |
| D | 0.75 | 0.80 | 0.85 |
| e | 0.45BSC | | |
| E | 0.35 | 0.40 | 0.45 |
| L | 0.05 | 0.10 | 0.15 |
| L1 | 0.075REF | | |

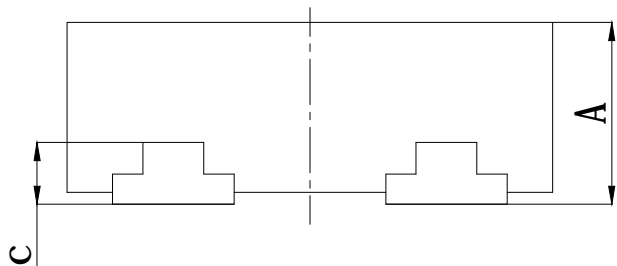

**

..... 8#9

/ Ž#! \$" \$) aa

| | | | |
|-------|----|-------|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | 5(| | |

| | | | |
|--|--|----------------------|--|
| | | | |
| HuaTi an Technology(Xi ' an) CO. , LTD | | | |
| DFN4L(0.80.4X0.30-0.45) (A) | | .<HBUSS(\$, S(SSS% | |
| | | | |
| mm | | S | |
| % | | % | |
| | | | |