



TOP VIEW

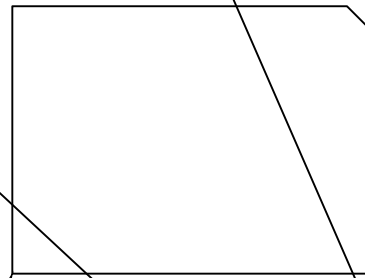


BOTTOM VIEW



SIDE VIEW

| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | 0.70 | 0.75 | 0.80 |
| A1 | 0 | 0.02 | 0.05 |
| b | 0.15 | 0.20 | 0.25 |
| b1 | 0.14REF | | |
| c | 0.203REF | | |
| D | 5.90 | 6.00 | 6.10 |
| D2 | 4.50 | 4.60 | 4.70 |
| Nd | 4.40 BSC | | |
| e | 0.40 BSC | | |
| E | 4.90 | 5.00 | 5.10 |
| E2 | 3.30 | 3.40 | 3.50 |
| L | 0.35 | 0.40 | 0.45 |

| | | | |
|------|--|------|--|
| | | | |
| | | | |
| | | | |
| | | | |


HuaTian Technology(Xi'an) CO., LTD
 QFN44L(0506X0.75-0.40) (A)
 . <HLS(S) S*SSS%
 mm
 5(% % ⊕ -