


SYMBOL	MILLIMETER			SYMBOL	MILLIMETER		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.85	0.90	0.95	e5	1.10BSC		
A1	0	0.02	0.05	e6	1.65BSC		
b	0.25	0.30	0.35	e7	1.91BSC		
b1	0.21REF			e8	0.725BSC		
b2	0.35	0.40	0.45	Ne	3.90BSC		
b3	0.25REF			E	7.90	8.00	8.10
c	0.203REF			E1	2.40	2.50	2.60
D	7.90	8.00	8.10	E2	3.10	3.20	3.30
D1	2.075	2.175	2.275	E3	1.45	1.55	1.65
D2	3.425	3.525	3.625	E4	0.40	0.50	0.60
D3	2.15	2.25	2.35	L	0.50	0.55	0.60
D4	1.425	1.525	1.625	L1	0.30REF		
e	0.65BSC			K	0.45REF		
e1	1.00BSC			K1	1.00REF		
e2	1.68BSC			K2	1.625REF		
e3	0.375BSC			K3	1.25REF		
e4	0.35BSC			h	0.30	0.35	0.40

PAD ZONE
EXPOSED THERMAL

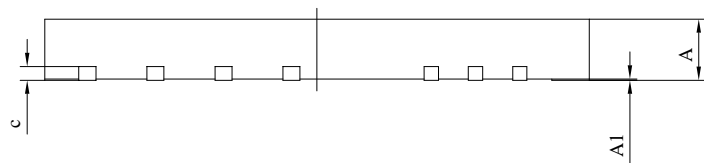

**

MNOP@QR

78	9	78CD	\$ 1	5 6
华天科技（西安）有限公司 HuaTi an Technology(Xi 'an)CO., LTD				
QFN29L(0808X0.90-0.65)(A) EFGH)) * :HTDX02908080001	
		- .	/ O	3 4
		mm	0/	
		+ 1 ,	2 1 ,	

() * I J K L

A B@ A4

> ? @

